


Dimensions

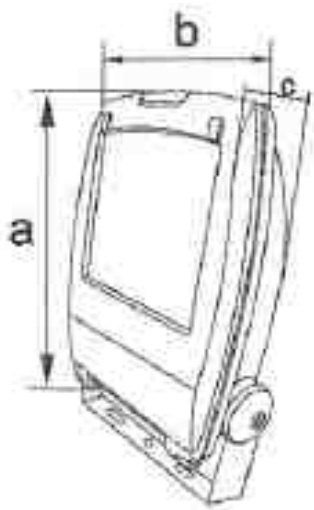

DESCRIPTION

LED floodlight design with steel bracket .
 Die-cast aluminum body and frame, opal gray polyester paint (RAL 9007).
 Antiage silicon rubber gasket .
 Stainless steel PG11
 Beam angle 120°
 LED Epistar high efficiency
 Driver 220/240 - 50/60Hz


IP65

ORDERING DATA

Model	Dimensions			Wattage	Colour temperature	Lumen flux	Weight
	A	B	C				
NX81065	180 mm	170 mm	55 mm	10 W	6500 K	650 lm	0,90Kg
NX82065	295 mm	245 mm	80 mm	20 W	6500 K	1300 lm	2,10Kg
NX83065	295 mm	245 mm	80 mm	30 W	6500 K	1950 lm	2,10Kg
NX85065	360 mm	325 mm	100 mm	50 W	6500 K	3250 lm	3,50Kg
NX87065	360 mm	325 mm	100 mm	70 W	6500 K	4550 lm	3,50Kg
NX81006	460 mm	380 mm	120 mm	100 W	6500 K	6500 lm	5,70Kg

The information contained in catalogues or advertising, as products specifications or components, dimensions, assembly drawings, colors, etc., are only approximative. The binding data may be provided from time to time and upon explicit request. In order to improve the quality of the products, the Nordex Illuminazione srl reserves to modify it without any notice. The Nordex Illuminazione srl reserves to make changes or reductions to the products and price lists without notice declining any responsibility for any inaccurate data.