



Dimensions

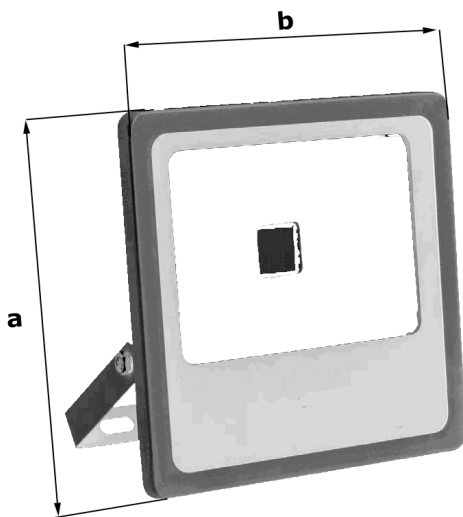

DESCRIPTION

Slim LED floodlight with steel bracket .
 Die-cast aluminum body, gray poliester paint (RAL 9007). Steel frame.
 Antiage silicon rubber gasket .
 Stainless steel PG11
 Beam angle 120°
 Driver 220/240 - 50/60Hz

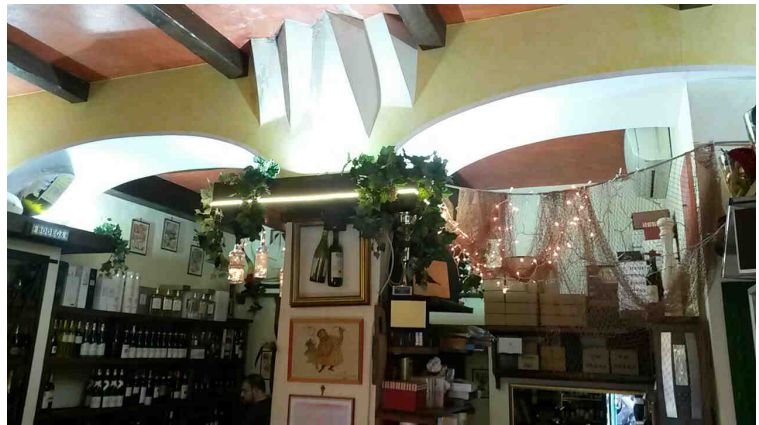

IP65

INFORMAZIONI D'ORDINE

Model	Dimensions			Wattage	Colour temperature	Lumen Flux	Weight
	A	B	Thickness				
NX84106	120 mm	125 mm	40 mm	10 W	6500 K	650 lm	0,50Kg
NX84206	185 mm	180 mm	45 mm	20 W	6500 K	1300 lm	0,95Kg
NX84306	225 mm	220 mm	50 mm	30 W	6500 K	1950 lm	1,40Kg
NX84506	285 mm	270 mm	66 mm	50 W	6500 K	3250 lm	1,95Kg

The information contained in catalogues or advertising, as products specifications or components, dimensions, assembly drawings, colors, etc., are only approximative. The binding data may be provided from time to time and upon explicit request. In order to improve the quality of the products, the Nordex Illuminazione srl reserves to modify it without any notice. The Nordex Illuminazione srl reserves to make changes or reductions to the products and price lists without notice declining any responsibility for any inaccurate data.