


Thermally toughened
4 mm. flat front glass.

Pre-wired control gear is
incorporated on a single
piece gear tray for ease of
installation and maintenance

The reflector is made of
high purity aluminium
for an enhanced
performance.

The body and frame are made
of high quality die-cast aluminium
alloy and powder coated in
corrosion resistant polyester to
RAL 9007 and applied over
a chromate conversion coating
for an extended service life.

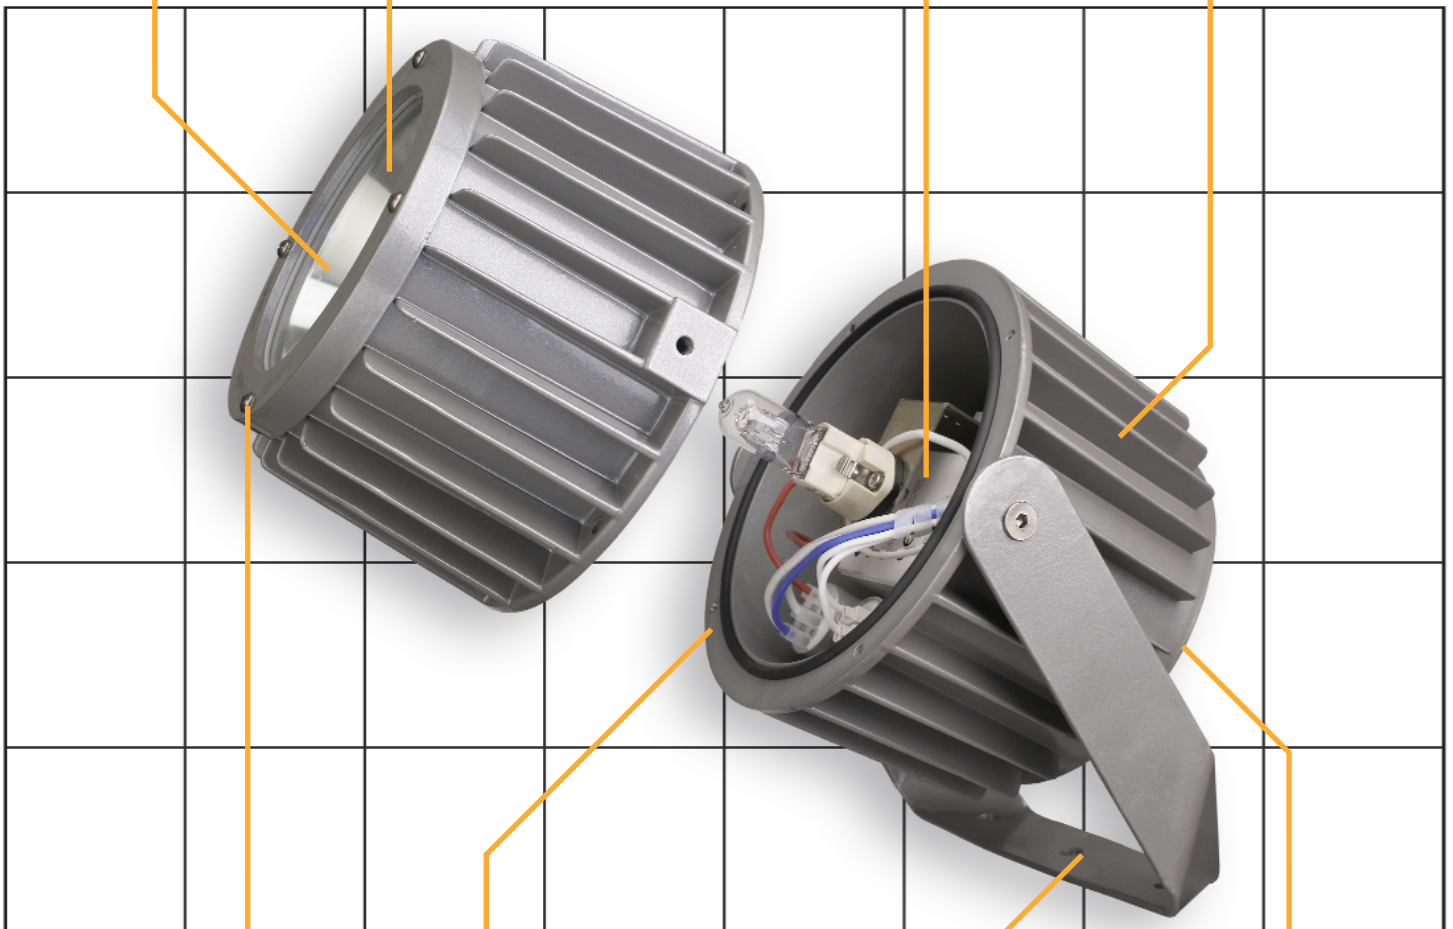

All fixings are corrosion resistant
stainless steel to AISI 304.

Cable entry is via an IP65
Pg 11 cable gland.

Internal gaskets are made of antiageing,
tropicalised and weather resistant silicon
rubber so ensuring trouble free use.
This IP65 luminaire is highly durable and
resistant to water and powder ingress.

Mounting is via a galvanised steel
bracket with three \varnothing 11 mm fixing
holes, powder coated in corrosion
resistant polyester to RAL 9007.